

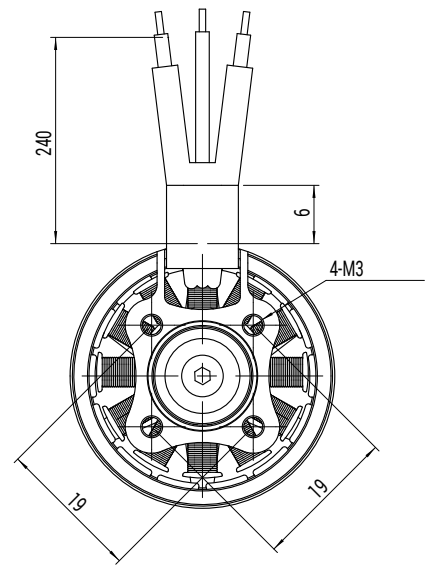
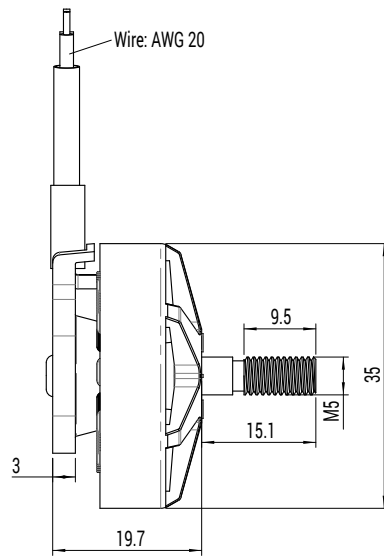


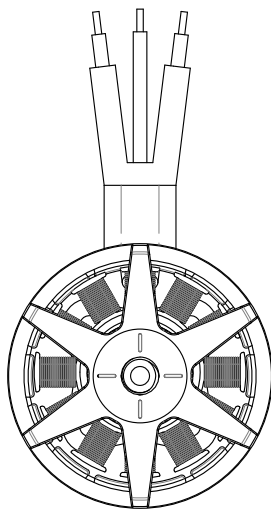

Speed Constant (Kv)	1350	rpm/V
Weight (incl. 25cm cable)	52.3	g
Operating Voltage Range	4-6S LiPo	
Stator Size	2807	
Stator Configuration	12N14P	
No-Load Current @ 10V	1.6	A
Terminal Resistance	65	mΩ
Torque Constant (Kt)	7.07	mNm/A
Max. Efficiency	>85	%
Operating Temperature Range	-40 ~ +80	°C
Storage Temperature Range	-40 ~ +80	°C

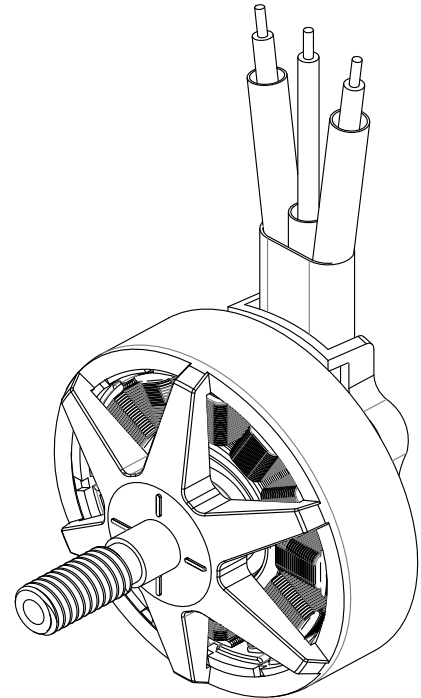

Dept.	Technical reference	Created by MONOPULSE	Approved by		
All units in mm Drawing scale 1:1		Document type	Document status		
		Title	DWG No.		
		MPM2807-1350 Spec Sheet	Rev.	Date of issue	Sheet
			1.0	09-2024	1/1